



Use

These are designed to connect onto flat copper or aluminium busbars where drilling of the existing bars is not possible or desirable.

Construction

Plates are made from copper bar. These are tin or silver plated unless this is not required in some temporary connection situations.

The connection is made by a contact band inserted into grooves milled into the copper bar. This provides high current carrying capacity and low insertion force.

Technical

		Per mm
Rated Thermal Current (A)		18A
Short-Circuit Current 2 sec (kA)		0.43
	3 sec (kA)	0.30
Resistance	($\mu \Omega \text{ mm}^{-1}$)	1000
Contact Force	(N mm ⁻¹)	3.0
Sliding Force	(N mm ⁻¹)	1.05

Kentan Engineering has carried out the following tests:

- Short Circuit at 50 and 65kA for 1 second.
- Temperature rise showing that there is negligible temp. increase at the contact area.
- Contact resistance verification.


Typical Examples of Connection Plates



Contact for electro-winning cell. (approx 600A)



Temporary cable connection onto 6.35mm busbars (approx 2000A)

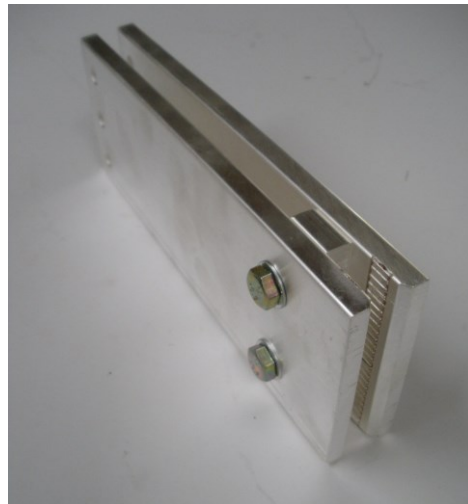

Connection plate for permanent extension of 10mm thick main busbars (approx 3500A)

KENTAN ENGINEERING

A.B.N 21 009 217 654

Unit 3, 8 Carole Road
MADDINGTON Western Australia 6109

P.O Box 284
MADDINGTON Western Australia 6989

International Telephone: 61 8 9493 5255

National Telephone: (08) 9493 5255

Facsimile: (08) 9493 5242

E-Mail: sales@kentan.com.au

Internet: www.kentan.com.au



Kentan Engineering is a Quality Assured Company